


# RELIABILITY TEST PROCEDURES FOR HC-49UX Series

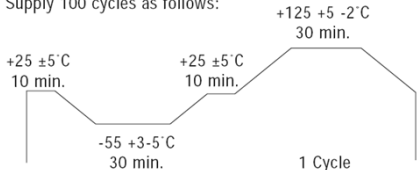

<u>NO.</u>	<u>TEST NAME</u>	<u>TEST PROCEDURES</u>	<u>REQUIREMENTS</u>
1	<b>SHOCK</b>	Drop 3 times from the height of 100cm onto hard wooden board.	Frequency Drift $\pm 5$ PPM Max. Resistance Drift $\pm 15\%$ Max.
2	<b>VIBRATION</b>	Vibration Frequency: 10 to 55Hz, 1.5mm, full wave Cycle: 2 min. Direction: X.Y.Z. Time: 2 hours in each direction	Frequency Drift $\pm 5$ PPM Max. Resistance Drift $\pm 15\%$ Max.
3	<b>STORAGE IN HIGH TEMPERATURE</b>	+85 $\pm 2^\circ\text{C}$ for 500 hours.	Frequency Drift $\pm 5$ PPM Max. Resistance Drift $\pm 15\%$ Max.
4	<b>STORAGE IN LOW TEMPERATURE</b>	-40 $\pm 2^\circ\text{C}$ for 500 hours.	Frequency Drift $\pm 5$ PPM Max. Resistance Drift $\pm 15\%$ Max.
5	<b>HUMIDITY</b>	+ 60 $\pm 2^\circ\text{C}$ in humidity 95% for 500 hours.	Frequency Drift $\pm 5$ PPM Max. Resistance Drift $\pm 15\%$ Max.
6	<b>THERMAL SHOCK</b>	Supply 500 cycles as follows: Temperature shift shall be done within 30 sec. -55 $\pm 2^\circ\text{C}$ <span style="float: right;">+125 <math>\pm 2^\circ\text{C}</math></span> (30 min) <-----> (30 min)	Frequency Drift $\pm 5$ PPM Max. Resistance Drift $\pm 15\%$ Max.
7	<b>TEMPERATURE CYCLE</b>	Supply 100 cycles as follows: 	Frequency Drift $\pm 5$ PPM Max. Resistance Drift $\pm 15\%$ Max.
8	<b>STRENGTH OF TERMINALS/LEAD WIRES</b>	<ul style="list-style-type: none"> <li>1) Lead Pull: Weight: 1 Kg Time: 30 sec.</li> <li>2) Lead Bend: Weight: 225 g Bending Angle: 90 degrees Bending Count: 2 times</li> </ul>	There are no visual abnormalities.  There are no visual abnormalities.
9	<b>SEALING TIGHTNESS MIL-STD 202F METHOD 112D TEST C AND D</b>	<ul style="list-style-type: none"> <li>1) Dipping in Florinert at: +125 <math>\pm 5^\circ\text{C}</math> for 5 min. (Gross Leak)</li> <li>2) Leak rate shall be measured by using: Helium leak Detector (Fine Leak)</li> </ul>	There are no visual abnormalities.  There are no visual abnormalities.
10	<b>Mean Time Between Failures (MTBF)</b>	$\text{MTBF (25}^\circ\text{C)} = \frac{E_a \times (1/T_1 - 1/T_2) / K}{\pi} \text{HsXe}^{\theta}\text{Ce}$	16396600 Hours