## ZUBOARD 1CG

# **AVNET**

The ZUBoard 1CG provides the flexibility and versatility for engineers to experiment with and learn the AMD Zynq® UltraScale+™ architecture. The affordable ZU1CG device features 81K programmable logic cells with a Dual-core Arm® Cortex®-A53 MPCore™ and Dual-core Arm Cortex-R5F MPCore, as well as cache and on-chip memory. The board also features 1GB of ISSI LPDDR4 with non-volatile boot options in the 256Mb ISSI QSPI Flash or a microSD card slot.

Microchip PHYs enable both 10/100/1000 Ethernet and USB 2.0 Host. A microUSB port provides on-board JTAG/UART access. Microchip oscillators and ECS crystals provide clocking to the ZU1 device, the on-chip real-time clock, JTAG, and communication interfaces. Power the board through USB-C with a Microchip controller and TDK µPOL™ power modules. A combination of slide switches, push buttons, mono- and RGB-LEDs allow user interaction with the board. Both temperature and pressure sensors from STMicroelectronics add environmental data to the system. Additionally, all four ZU+ PS GTR transceivers, 18 PS MIO, and 69 PL I/Os are exposed through Samtec expansion connectors and one Click Board™ site.

With a Vivado-enabled board definition file and PetaLinux BSP, you will be up and running in no time! Whether you want to explore bare metal, Linux, or Vitis Al accelerators, the ZUBoard 1CG will give you a base foundation to experiment.

#### **Features**

- AMD ZU+ MPSoC ZU1CG
  - Dual A53 APU and Dual R5 RPU
  - 256KB On-chip Memory
  - 81,900 FPGA Logic Cells
- ISSI 1GB LPDDR4 with on-chip ECC
- Boot from ISSI 256Mb QSPI or microSD card
- PetaLinux environment available for download
- Microchip 10/100/1000 Wired
  Ethernet PHY and MAC ID EEPROM
- Microchip USB 2.0 PHY
- Microchip USB-C input power control

- Dialog GreenPAK™ on/off controller and power sequencer
- TDK  $\mu POL^{\intercal_M}$  power modules
- On-board JTAG and UART debug interface
- STMicroelectronics Temperature and Pressure Sensors
- Battery-backed Real-Time Clock and FPGA Bitstream Security enabled with ECS and Custom Power
- Expansion enabled by three Samtec connectors
- User RGB and Monochrome LEDs
- User Slide Switch and Push Button I/O



#### Kit includes

- ZUBoard 1CG
- Quick-start card
- Free downloadable AMD Vitis and Vivado ML Standard
  Edition
- Free downloadable PetaLinux BSP and reference designs


## Target apps

- Artificial intelligence
- Machine learning
- Embedded Vision
- Embedded processing
- Robotics

#### **Markets**

- Communications
- Healthcare
- Embedded Vision
- Home & Building Automation
- Industrial
- Lighting
- Security & Surveillance
- IoT Design
- Electronic Component Engineering

## **Block diagram**

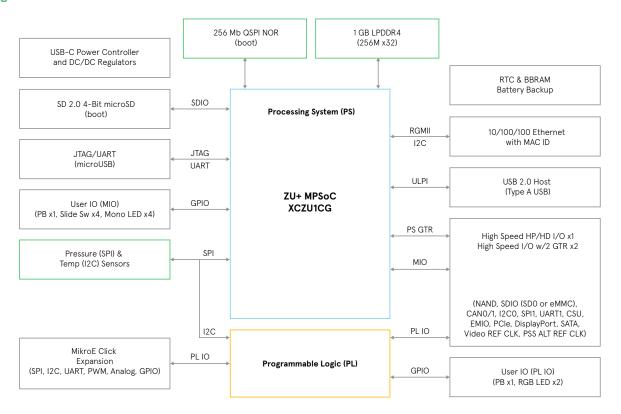

#### **Featured manufacturers**

















#### **Parts**

Part number	Description	Price and availability
AES-ZUB-1CG-DK-G	ZUBoard 1CG development board with ZU+ MPSoC (ZU1CG)	avnet.me/zuboard-1cg-pdp

## Related parts

Part number	Description	Price and availability
AES-ACC-DPEMMC-G	DisplayPort & eMMC High Speed Mezzanine	avnet.me/dpemmc-pdp
AES-ACC-DUALCAM-G	Avnet Dual Camera High Speed I/O Module	avnet.me/dualcam-hsio-module-pdp
S408APGE9-U1000-3	8GB Utility microSD card	avnet.me/Delkin8GB-microSD-pdp
SDSDQAF3-032G-XI	32GB Industrial microSD card	avnet.me/WDC32GB-microSD-pdp
PSA-A45WM-U	USB-C AC/DC Power Supply, NA, 2-Pin, ITE, 1 Output, 45 W, 20 V, 2.25 A	avnet.me/Advantech-USBCpower-pdp
C06026-00013	USB Cable, Shielded, 3.0A, USB Type C Plug, 1m, 3.3ft, USB 2.0 White	avnet.me/USBC-1m-cable-pdp

## **Countries available for purchase:**

North America 2211 S 47th Street Phoenix, Arizona 85034 United States of America 1-800-585-1602

Europe (Silica) Gruber Str. 60c 85586 Poing Germany +49-8121-77702 Europe (EBV) Im Technologypark 2-8 85586 Poing Germany http://ebv.com/contact

Japan Yebisu Garden Place Tower, 23F 4-20-3 Ebisu, Shibuya-ku Tokyo 150-6023 Japan eval-kits-jp@avnet.com +81-(0)3-5792-8210

Asia 151 Lorong Chuan #06-03 New Tech Park Singapore 556741 amd-xilinxapac@avnet.com +65-6580-6000